

MC1458, MC1558 DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS069 – FEBRUARY 1971 – REVISED OCTOBER 1990

- Short-Circuit Protection
- Wide Common-Mode and Differential Voltage Ranges
- No Frequency Compensation Required
- Low Power Consumption
- No Latch-Up
- Designed to Be Interchangeable With Motorola MC1558/MC1458 and Signetics S5558/N5558


description

The MC1458 and MC1558 are dual general-purpose operational amplifiers with each half electrically similar to the μ A741 except that offset null capability is not provided.


The high-common-mode input voltage range and the absence of latch-up make these amplifiers ideal for voltage-follower applications. The devices are short-circuit protected and the internal frequency compensation ensures stability without external components.

The MC1458 is characterized for operation from 0°C to 70°C. The MC1558 is characterized for operation over the full military temperature range of -55°C to 125°C.


symbol (each amplifier)

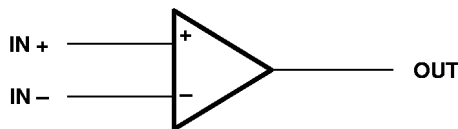


MC1458 . . . D OR P PACKAGE
MC1558 . . . JG PACKAGE
(TOP VIEW)



MC1558 . . . U PACKAGE
(TOP VIEW)



MC1558 . . . FK PACKAGE
(TOP VIEW)

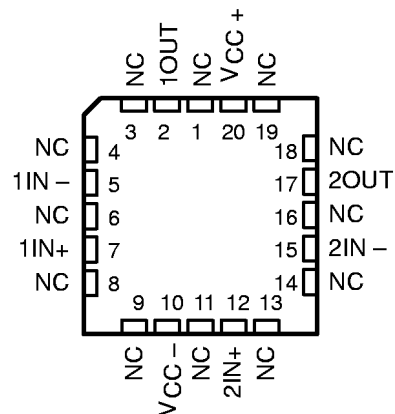

NC – No internal connection

AVAILABLE OPTIONS


| T _A | V _{IO} max AT 25°C | PACKAGE | | | | |
|----------------|--------------------------------|-------------------------|-------------------------|------------------------|-----------------------|-----------------------------|
| | | SMALL OUTLINE (D) | CHIP CARRIER (FK) | CERAMIC DIP (JG) | PLASTIC DIP (P) | CERAMIC FLAT PACK (U) |
| 0°C to 70°C | 6 mV | MC1458CD | — | — | MC1458CP | — |
| -55°C to 125°C | 5 mV | — | MC1558MFK | MC1558MSG | — | MC1558MU |

The D packages are available taped and reeled. Add the suffix R to the device type (i.e., MC1458DR)

MC1458, MC1558 DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS069 – FEBRUARY 1971 – REVISED OCTOBER 1990

schematic (each amplifier)

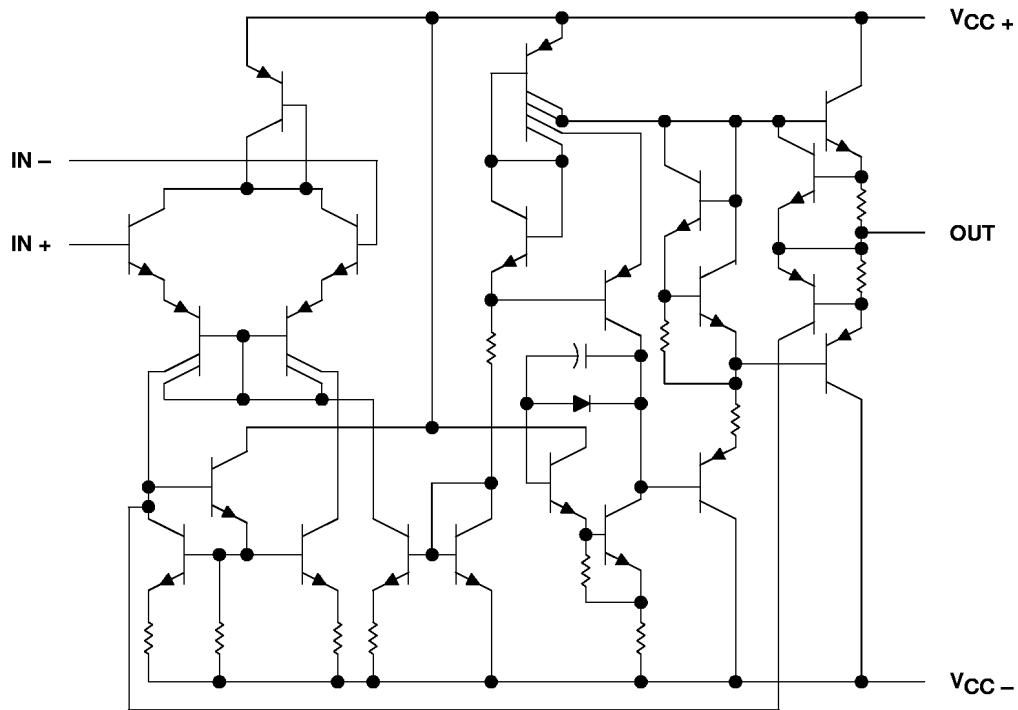

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | MC1458 | MC1558 | UNIT |
|--|------------------------------|------------|--------------------|
| Supply voltage V_{CC+} (see Note 1) | 18 | 22 | V |
| Supply voltage V_{CC-} (see Note 1) | -18 | -22 | V |
| Differential input voltage (see Note 2) | ± 30 | ± 30 | V |
| Input voltage at either input (see Notes 1 and 3) | ± 15 | ± 15 | V |
| Duration of output short circuit (see Note 4) | unlimited | unlimited | |
| Continuous total dissipation | See Dissipation Rating Table | | |
| Operating free-air temperature range | 0 to 70 | -55 to 125 | $^{\circ}\text{C}$ |
| Storage temperature range | 65 to 150 | -65 to 150 | $^{\circ}\text{C}$ |
| Case temperature for 60 seconds: FK package | | 260 | $^{\circ}\text{C}$ |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds | JG or U package | 300 | $^{\circ}\text{C}$ |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | D or P package | 260 | $^{\circ}\text{C}$ |

- NOTES: 1. All voltage values, unless otherwise noted, are with respect to the midpoint between V_{CC+} and V_{CC-} .
 2. Differential voltages are at IN+ with respect to IN-.
 3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
 4. The output can be shorted to ground or either power supply. For the MC1558 only, the unlimited duration of the short circuit applies at (or below) 125 $^{\circ}\text{C}$ case temperature or 70 $^{\circ}\text{C}$ free-air temperature.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^{\circ}\text{C}$ POWER RATING | DERATING FACTOR | DERATE ABOVE T_A | $T_A = 70^{\circ}\text{C}$ POWER RATING | $T_A = 125^{\circ}\text{C}$ POWER RATING |
|---------|---|-----------------------------|-----------------------|--|---|
| D | 680 mW | 5.8 mW/ $^{\circ}\text{C}$ | 33 $^{\circ}\text{C}$ | 464 mW | — |
| FK | 680 mW | 11.0 mW/ $^{\circ}\text{C}$ | 88 $^{\circ}\text{C}$ | 880 mW | 275 mW |
| JG | 680 mW | 8.4 mW/ $^{\circ}\text{C}$ | 69 $^{\circ}\text{C}$ | 672 mW | 210 mW |
| P | 680 mW | 8.0 mW/ $^{\circ}\text{C}$ | 65 $^{\circ}\text{C}$ | 640 mW | — |
| U | 675 mW | 5.4 mW/ $^{\circ}\text{C}$ | 25 $^{\circ}\text{C}$ | 432 mW | 135 mW |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

MC1458, MC1558 DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS069 – FEBRUARY 1971 – REVISED OCTOBER 1990

recommended operating conditions

| | MIN | NOM | MAX | UNIT |
|-----------------------------|---------|-----|----------|------|
| Supply voltage, $V_{CC\pm}$ | ± 5 | | ± 15 | V |

electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V

| PARAMETER | TEST CONDITION [†] | MC1458 | | | MC1558 | | | UNIT |
|--|--|-------------|----------|----------|----------|----------|------------------------|------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| V_{IO} Input offset voltage | $V_O = 0$ | 25°C | 1 | 6 | 1 | 5 | mV | |
| | | Full range | | 7.5 | | 6 | | |
| I_{IO} Input offset current | $V_O = 0$ | 25°C | 20 | 200 | 20 | 200 | nA | |
| | | Full range | | 300 | | 500 | | |
| I_{IB} Input bias current | $V_O = 0$ | 25°C | 80 | 500 | 80 | 500 | nA | |
| | | Full range | | 800 | | 1500 | | |
| V_{ICR} Common-mode input voltage range | | 25°C | ± 12 | ± 13 | ± 12 | ± 13 | V | |
| | | Full range | ± 12 | | ± 12 | | | |
| V_{OM} Maximum peak output voltage swing | $R_L = 10$ k Ω | 25°C | ± 12 | ± 14 | ± 12 | ± 14 | V | |
| | $R_L \geq 10$ k Ω | Full range | ± 12 | | ± 12 | | | |
| | $R_L = 2$ k Ω | 25°C | ± 10 | ± 13 | ± 10 | ± 13 | | |
| | $R_L \geq 2$ k Ω | Full range | ± 10 | | ± 10 | | | |
| A_{VD} Large-signal differential voltage amplification | $R_L \geq 2$ k Ω , $V_O = \pm 10$ V | 25°C | 20 | 200 | 50 | 200 | V/mV | |
| | | Full range | 15 | | 25 | | | |
| B_{OM} Maximum-output-swing bandwidth (closed loop) | $R_L = 2$ k Ω , $V_O \geq \pm 10$ V, $A_{VD} = 1$, THD $\geq 5\%$ | 25°C | | 14 | | 14 | kHz | |
| B_1 Unity-gain bandwidth | | 25°C | | 1 | | 1 | MHz | |
| ϕ_m Phase margin | $A_{VD} = 1$ | 25°C | | 65 | | 65 | °C | |
| | | Gain margin | 25°C | | 11 | | | 11 |
| r_i Input resistance | | 25°C | 0.3* | 2 | 0.3* | 2 | M Ω | |
| r_o Output resistance | $V_O = 0$, See Note 5 | 25°C | | 75 | | 75 | Ω | |
| C_i Input capacitance | | 25°C | | 1.4 | | 1.4 | pF | |
| z_{ic} Common-mode input impedance | $f = 20$ Hz | 25°C | | 200 | | 200 | M Ω | |
| CMRR Common-mode rejection ratio | $V_{IC} = V_{ICR}$ min, $V_O = 0$ | 25°C | 70 | 90 | 70 | 90 | dB | |
| | | Full range | 70 | | 70 | | | |
| k_{SVS} Supply voltage sensitivity ($\Delta V_{IO}/\Delta V_{CC}$) | $V_{CC} = \pm 9$ V to ± 15 V, $V_O = 0$ | 25°C | 30 | 150 | 30 | 150 | μ V/V | |
| | | Full range | | 150 | | 150 | | |
| V_n Equivalent input noise voltage (closed loop) | $A_{VD} = 100$, $R_S = 0$, $f = 1$ kHz, $BW = 1$ Hz | 25°C | | 45 | | 45 | nV/ $\sqrt{\text{Hz}}$ | |

*This parameter is not production tested.

[†] All characteristics are specified under open-loop operating conditions with zero common-mode input voltage unless otherwise specified. Full range for MC1458 is 0°C to 70°C and for MC1558 is -55°C to 125°C.

NOTE 5: This typical value applies only at frequencies above a few hundred hertz because of the effect of drift and thermal feedback.



MC1458, MC1558 DUAL GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

SLOS069 – FEBRUARY 1971 – REVISED OCTOBER 1990

electrical characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15\text{ V}$ (continued)

| PARAMETER | TEST CONDITION [†] | MC1458 | | | MC1558 | | | UNIT | |
|-----------------|---|---------------------|------------|-----|--------|-----|-----|------|----|
| | | MIN | TYP | MAX | MIN | TYP | MAX | | |
| I_{OS} | Short-circuit output current | | 25°C | ±25 | ±40 | | ±25 | ±40 | mA |
| I_{CC} | Supply current (both amplifiers) | $V_O = 0$, No load | 25°C | 3.4 | 5.6 | | 3.4 | 5 | mA |
| | | | Full range | | 6.6 | | 6.6 | | |
| P_D | Total power dissipation (both amplifiers) | $V_O = 0$, No load | 25°C | 100 | 170 | | 100 | 150 | mW |
| | | | Full range | | 200 | | 200 | | |
| V_{O1}/V_{O2} | Crosstalk attenuation | | 25°C | 120 | | | 120 | | dB |

[†] All characteristics are specified under open-loop operating conditions with zero common-mode input voltage unless otherwise specified. Full range for MC1458 is 0°C to 70°C and for MC1558 is -55°C to 125°C.

operating characteristics, $V_{CC\pm} = \pm 15\text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | MC1458 | | | MC1558 | | | UNIT |
|-----------|-------------------------|---|-----|-----|---|-----|-----|------------------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| t_r | Rise time | $V_I = 20\text{ mV}$, $R_L = 2\text{ k}\Omega$ | | | $V_I = 20\text{ mV}$, $R_L = 2\text{ k}\Omega$ | | | μs |
| | Overshoot factor | $C_L = 100\text{ pF}$, See Figure 1 | | | $C_L = 100\text{ pF}$, See Figure 1 | | | |
| SR | Slew rate at unity gain | $V_I = 10\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, See Figure 1 | | | $V_I = 10\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, See Figure 1 | | | $\text{V}/\mu\text{s}$ |

PARAMETER MEASUREMENT INFORMATION

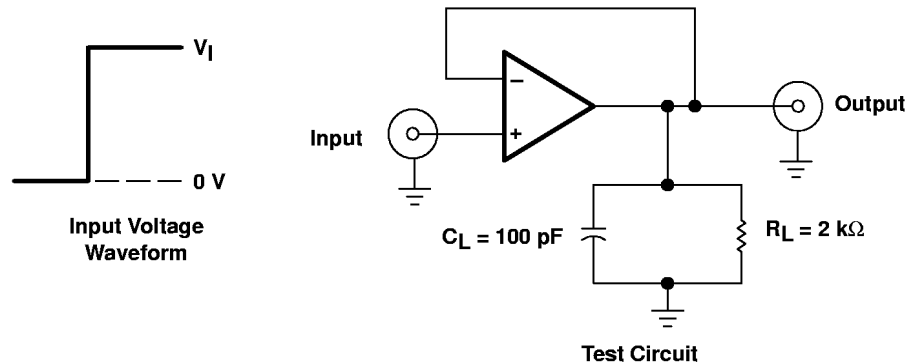


Figure 1. Rise Time, Overshoot, and Slew Rate Waveform and Test Circuit